


MX25



Specificaties		VMX25ER
	kg	1224
	l/min	20 - 30
	bar	120
	l/min	170 - 210
	bar	350
	t	18 - 27

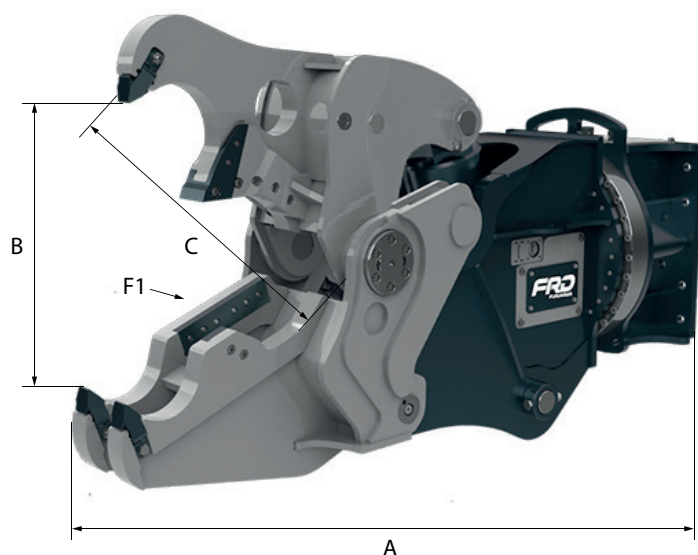

Specificaties		VMX25-P
A	mm	2074
B	mm	780
C	mm	760
F1	kN	800
 Totaal	kg	2066
 Bek	kg	842
	mm	35



FURUKAWA - VMX25



Specificaties		VMX25-C
A	mm	1853
B	mm	392
C	mm	493
F1	kN	1150
 Totaal	kg	2027
 Bek	kg	803
	mm	50
	mm	12
	mm	270
	mm	200

Specificaties		VMX25-M
A	mm	2070
B	mm	780
C	mm	760
F1	kN	800
 Totaal	kg	2113
 Bek	kg	889
	mm	35
	mm	240
	mm	180



FURUKAWA - VMX25



Specificaties		VMX25-S
A	mm	2088
B	mm	780
C	mm	780
F1	kN	800
 Totaal	kg	2111
 Bek	kg	887
	mm	35
I	mm	120



Specificaties		VMX25-SW
A	mm	2063
B	mm	755
C	mm	677
F1	kN	850
 Totaal	kg	2180
 Bek	kg	956
	mm	35

